



## bestflush – for simple bleeding



- Simple bleeding
- For 100% use of the filter capacity
- Enables short flushing of filter cartridges
- Food safe
- Saves water time and money

bestflush enables simple commissioning and optimal performance of all filter cartridges from water+more by BWT. bestflush is a 3-way valve made from food-safe plastic which guarantees complete bleeding and can be used to carry out a rinsing process if required.

During bleeding (flush setting) water flows into the filter cartridge in a controlled manner, flushes the filter media and forces the air out until no air bubbles emerge from the bleeding nipple or bleeding hose. bestflush makes bleeding child's play: quick, easy and complete for 100% usage of the filter capacity from water+more by BWT filter cartridges.

### bestflush – multifunctional and safe

#### flush:


Simple bleeding and as option for filter rinsing

#### open:

Standard setting for the operation of filter cartridges from water+more by BWT

#### close:

Isolating function, stops water flow to the appliance. Extremely useful e.g. for maintenance work – no need to dismantle the filter cartridge.

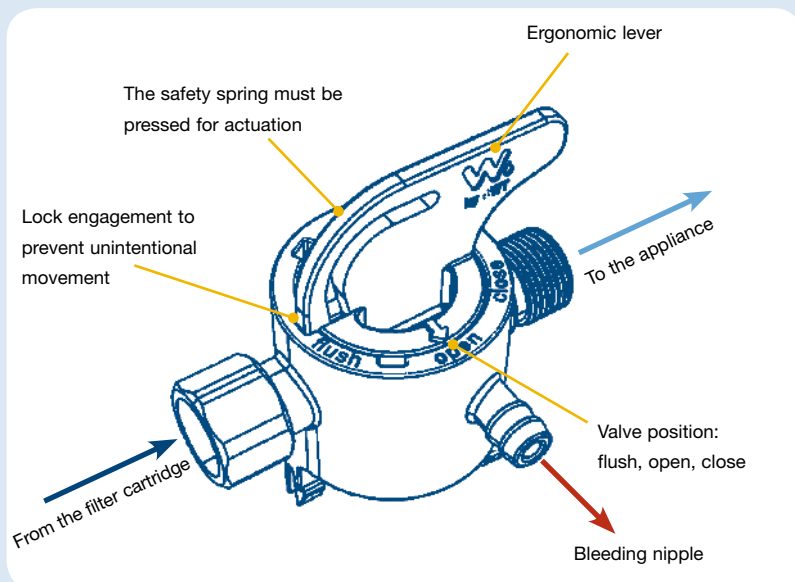

**bestflush – assembled on filter head from water+more by BWT**



- a Filter cartridge from water+more by BWT
- b Filter head
- c bestflush
- d Bleeding hose

bestflush can be assembled directly on the outlet of the filter head. Or even better: simply clip the bestflush onto the plastic bracket supplied with every filter cartridge from water+more by BWT. The connection hose is available as an accessory for this purpose.

**bestflush saves more**

Minimal water consumption for bleeding to ensure air-bubble free operation. Note: Filter cartridges from water+more by BWT require no activation or time-consuming rinsing! With bestflush you can reduce your water consumption to a minimum. You save time and money.

Filter cartridge	Typical water consumption for bleeding to ensure air-bubble free operation
bestmax S	1–2 l
bestmax M	2–4 l
bestmax L, XL	3–6 l

**Technical Data**

bestflush	
Pressure	10 bar
Installation height	60 mm
Installation length	70/120 mm
Connection thread	3/8"

**Scope of delivery:**

- bestflush 3/8" external thread x 3/8" flush valve with nut, with flush and isolating function
- Order No.: FS00Y04A00**

**Accessories**

- Hose 3/8" internal thread x 3/8" external thread (300 mm; optional)
- Order No.: FS00Y13A00**



A comprehensive range of filter cartridges with "single head technology" is available for coffee machines with a mains water connection.

**water+more by BWT**

Products and services to optimise water and meet the specific requirements of the catering sector and of those wanting to enjoy great coffee at home.



**water+more by BWT GmbH**  
 Spiegelgasse 13  
 D-65183 Wiesbaden  
 Telefon +49.611.58019-0  
 Telefax +49.611.58019-22  
[www.water-and-more.com](http://www.water-and-more.com)