



## besttaste – the best water for hot and cold drinks



- High filter capacities
- Reliable particle retention
- Immediate pure water that tastes good
- Quick and easy filter change

### besttaste filter cartridges

provide the best water for your vending machines, coffee machines and water dispensers.

Installation-related particles or even a troubling unpleasant taste or odour (e.g. chlorine) are reliably eliminated.

This guarantees an optimal taste for all hot and cold drinks.

besttaste enables water, e.g. for water dispensers, to maintain a consistently high quality. But coffee machines and vending machines can also benefit from the improved water quality in areas with low carbonate hardness.

And for areas with high carbonate hardness (scale content), bestmax filter cartridges are the ideal addition from water+more by BWT – fitting into the same connection technology (filter head).

### besttaste top technology

- Immediate best, particle-free water
- No time-consuming rinsing
- Horizontal and vertical installation possible

### Connection technology


- Universal filter head from water+more by BWT
- Automatic shut-off valve when changing filter
- Pivoting wall bracket

### Scope of delivery

- Filter cartridge
- Universal filter head with 3/8" external thread (incl. bypass setting and return valve)
- Wall mounting bracket (without fixing material)
- Installation and operating instructions


### Accessories

- Connecting hose 1500 mm (3/8" x 3/8" or 3/8" x 3/4")
- bestflush 3/8" flush valve x 3/8" connection thread with nut, with flush and isolating function, order no.: FS00Y04A00

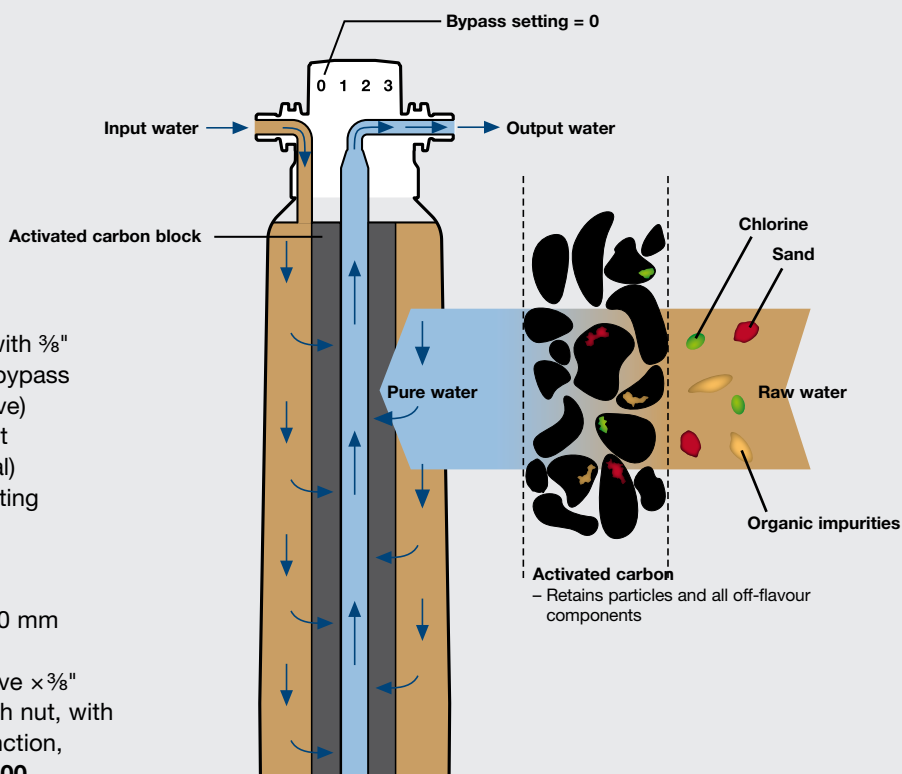

Layout of a besttaste filter cartridge

## Technical Data

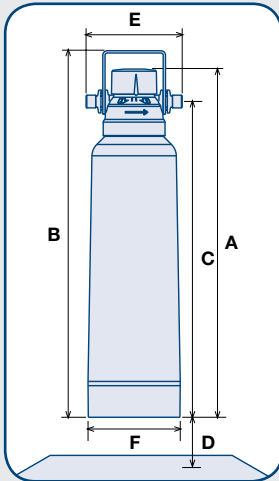

besttaste Type	S-1	S-2
Connection thread (in/out)	3/8"	3/8"
Nominal flow [l/h]	180	180
Pressure loss at the nominal flow rate [bar]	0.8	0.8
Typical capacity [litres]	7,500*	10,000*
Particle filtration [µm]	20	5
Useful pressure range, min.–max. [kPa]/[bar]	200–800/2–8	200–800/2–8
Flow pressure [bar]	> 1.2	> 1.2
Water temperature, min.–max. [°C]	4–30	4–30
Ambient temperature during operation, min.–max. [°C]	4–40	4–40
Ambient temperature during storage/transportation [°C]	-20–50	-20–50
Total height without bracket A [mm]	345	345
Total height with bracket B [mm]	370	370
Connection height C [mm]	340	340
Distance from floor D [mm]	65	65
Installed length E [mm]	126	126
Filter cartridges Ø F [mm]	88	88
Weight (dry/wet) (approximate) [kg]	0.90/1.70	0.90/1.70
Operating position	Horizontal or vertical	
Order number for Installation Set	FS22A01A00	FS22B01A00
Order number for filter cartridge	FS22A00A00	FS22B00A00

\* max. 12 months

Even the best drinking water should always be optimised for professional applications. besttaste and bestmax are ideal products for this – with universal connection technology (filter head), for maximum flexibility.

### besttaste

- Eliminates unwanted odour and taste in the water
- Reduces the level of heavy metals
- Eliminates particles from 5 µm to 20 µm – as required
- With filter capacities up to 10,000 litres – as required
- Special silvering of the activated carbon checks the growth of bacteria



### Ideal for vending machines

- Compact and space-saving
- Simple filter exchange
- High filter capacities

### bestmax filter cartridges

In areas with a high local carbonate hardness (scale content above 7 °KH), our bestmax product range is available with the same universal connection technology.

- Flexible – only one connecting filter head for all product sizes
- Capacity of 820–7,500 l
- Simple – quick filter change, simple disposable system
- Cost-efficient – ideal for all compact catering appliances